


MULTI PROCESSORS



HYD.ROTATION

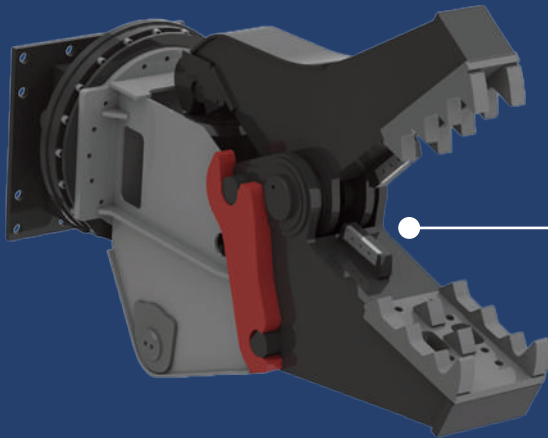

SPEED VALVE



HARDOX WEAR PLATE



QUICK CHANGE



CRUSHER JAW



PULVERIZER JAW



SHEAR JAW

QUICK JAW CHANGE

MP's quick jaw change system takes only few minutes to change jaws thanks to simple two rotating pin design allowing the operator to demolish, process and sort material, all with the one attachment. This will eliminate the downtime associated with changing implements or the added cost of using more than one machine on the job.

SPECIFICATIONS

Multi Processor		Unit	MP20	MP30
Carrier Weight		ton	18 - 25	25 - 35
Weight of body frame		kg	1,150	1,450
Oil pressure		bar	320	320
Oil flow		l/min	180	220
Hyd.Rotation	Oil Pressure	bar	130	140
	Oil flow	l/min	40	40
Open/Close		sec	2.1/1.9	2.5/2.2

Crusher Jaw		Unit	MP20	MP30
Weight		kg	1,950	2,450
Crusher Jaw Weight		kg	750	960
Jaw opening		mm	720	820
Length of cutters		mm	190	240
Closing force	Tip	ton	76	105
	Middle	ton	105	150
	Throat	ton	250	380

Pulverizer Jaw		Unit	MP20	MP30
Weight		kg	1,970	2,470
Pulverizer Jaw Weight		kg	780	980
Jaw opening		mm	705	880
Length of cutters		mm	150	190
Closing force	Tip	ton	70	100
	Middle	ton	120	170
	Throat	ton	290	380

Shear Jaw		Unit	MP20	MP30
Weight		kg	1,900	2,380
Shear Jaw Weight		kg	744	930
Jaw opening		mm	390	480
Closing force	Tip	ton	100	135
	Middle	ton	170	235
	Throat	ton	380	550

Specifications are subject to change without notice