


MULTI PROCESSORS



HYD.ROTATION

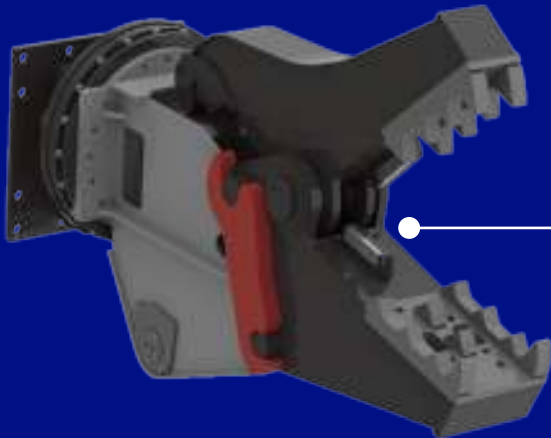

SPEED VALVE



HARDOX WEAR PLATE



QUICK CHANGE



CRUSHER JAW



PULVERIZER JAW



SHEAR JAW

QUICK JAW CHANGE

MP's quick jaw change system takes only few minutes to change jaws thanks to simple two rotating pin design allowing the operator to demolish, process and sort material, all with the one attachment. This will eliminate the downtime associated with changing implements or the added cost of using more than one machine on the job.

SPECIFICATIONS

| Multi Processor | | Unit | MP20 | MP30 |
|----------------------|--------------|-------|---------|---------|
| Carrier Weight | | ton | 18 - 25 | 25 - 35 |
| Weight of body frame | | kg | 1,150 | 1,450 |
| Oil pressure | | bar | 320 | 320 |
| Oil flow | | l/min | 180 | 220 |
| Hyd.Rotation | Oil Pressure | bar | 130 | 140 |
| | Oil flow | l/min | 40 | 40 |
| Open/Close | | sec | 2.1/1.9 | 2.5/2.2 |

| Crusher Jaw | | Unit | MP20 | MP30 |
|--------------------|--------|------|-------|-------|
| Weight | | kg | 1,950 | 2,450 |
| Crusher Jaw Weight | | kg | 750 | 960 |
| Jaw opening | | mm | 720 | 820 |
| Length of cutters | | mm | 190 | 240 |
| Closing force | Tip | ton | 76 | 105 |
| | Middle | ton | 105 | 150 |
| | Throat | ton | 250 | 380 |

| Pulverizer Jaw | | Unit | MP20 | MP30 |
|-----------------------|--------|------|-------|-------|
| Weight | | kg | 1,970 | 2,470 |
| Pulverizer Jaw Weight | | kg | 780 | 980 |
| Jaw opening | | mm | 705 | 880 |
| Length of cutters | | mm | 150 | 190 |
| Closing force | Tip | ton | 70 | 100 |
| | Middle | ton | 120 | 170 |
| | Throat | ton | 290 | 380 |

| Shear Jaw | | Unit | MP20 | MP30 |
|------------------|--------|------|-------|-------|
| Weight | | kg | 1,900 | 2,380 |
| Shear Jaw Weight | | kg | 744 | 930 |
| Jaw opening | | mm | 390 | 480 |
| Closing force | Tip | ton | 100 | 135 |
| | Middle | ton | 170 | 235 |
| | Throat | ton | 380 | 550 |

Specifications are subject to change without notice