


# CLAMSHELL BUCKETS

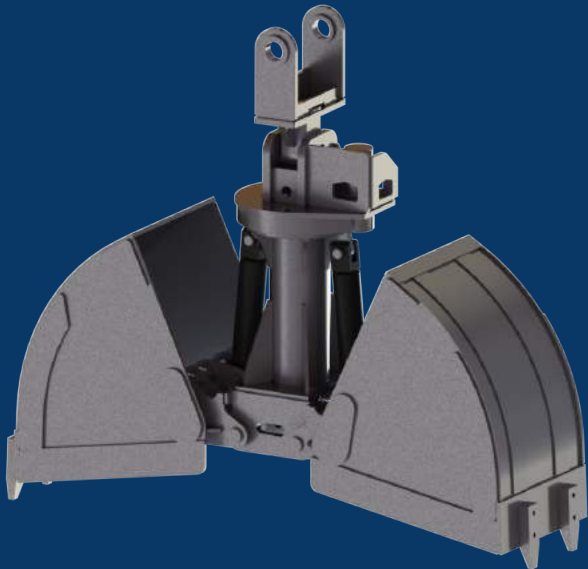


**Clamshell Buckets are designed for the movement of earth sand, gravel, mud, cereals, coal, industrial and agricultural waste, minerals, etc.**

## 360° HYDRAULIC ROTATION

-provides fast and precise positioning of the jaws.

## HIGH QUALITY MATERIAL

-built with high quality steel for maximum strength and abrasion resistance.

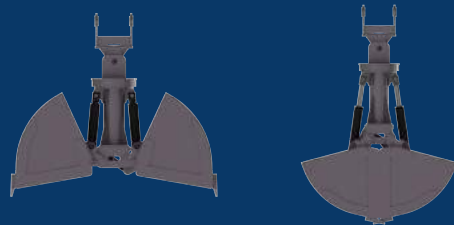

## SPECIFICATIONS

Model	Unit	TCB600	TCB800	TCB1000	TCB1500	
Carrier Weight	ton	12-18	19-26	27-36	34-40	
Operating Weight	kg	900	1100	1500	2200	
Volume	m <sup>3</sup>	0.6	0.8	1	1.5	
Max. Oil Pressure	bar	280	280	280	280	
Rated Oil Flow	l/min	130	150	200	220	
Hyd. Rotation	Pressure	bar	150	150	150	150
	Oil Flow	l/min	30	30	30	30
Max. Opening	mm	1,990	2,000	2,165	2,450	
Height	mm	1,859	2,450	2,575	2,833	

Specifications are subject to change without notice

